
Do you need a NEW Boundary Fence...



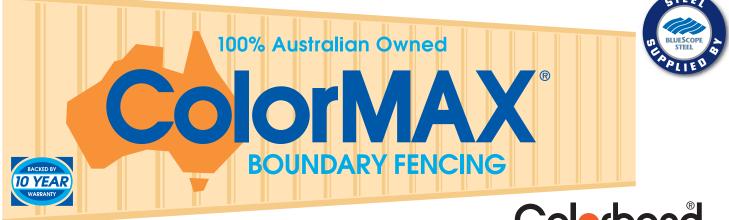

Manufactured from Colerbond

 ${\tt Colorbond}^{\circledast}$ is a Registered Trademark of BlueScope Steel Limited

ColorMAX® is a Registered Trademark of Dunn & Farrugia Pty Ltd ACN 054 010 007

HEAD OFFICE (Factory/Showroom) 44 Preston Street PENRITH NSW

 ALBION PARK
 BROOKVALE
 DUBBO
 MINCHINBURY
 NOWRA
 QUEANBEYAN
 SMEATON GRANGE
 WEST GOSFORD
 ROCKLEA QLD

 (02) 4257 5977
 (02) 9907 1007
 (02) 6882 6434
 (02) 9675 2822
 (02) 4421 3301
 (02) 6284 2688
 (02) 4647 2507
 (02) 4324 4122
 (07) 3275 3700

www.dunnandfarrugia.com.au





Think strength... think COLORBOND® steel

Leading scientists have been testing COLORBOND® steel for over 40 years in some of our country's harshest climate conditions. So you have the peace of mind of knowing COLORBOND® steel is made and tested for Australia and backed by a warranty* from BlueScope Steel, one of Australia's largest companies.



Make your great outdoors even greater




Elegant, affordable & durable **ColorMAX**[®] Boundary Fencing.


Manufactured from **Colerbond** Let it be your choice!

Colerbond

Make sure it's the real thing

Not all coloured steel fencing is made from COLORBOND® steel. Be sure to get what you pay for. Fencing made from COLORBOND® steel is branded with a subtle laser engraving (on either








Whether your primary concern is security, simply making an aesthetic addition to your property or you want to erect the very best boundary fencing to divide you and your neighbours property – insist on **ColorMAX®** Boundary Fencing manufactured from COLORBOND®.

Available in two profiles **ColorMAX[®]** Original and **ColorMAX[®] REFLECT[™]** and 18 exciting colours with the option of pressed 3D lattice, **LouvrLAT[®]**, plastic post caps and decorative metal ball caps backed by the strength of a BlueScope Steel Warranty.

ColorMAX® Boundary Fencing meets Australian Standards AS1397 and AS2728 and when installed to manufacturers specifications has a wind gust loading of 216km/h.

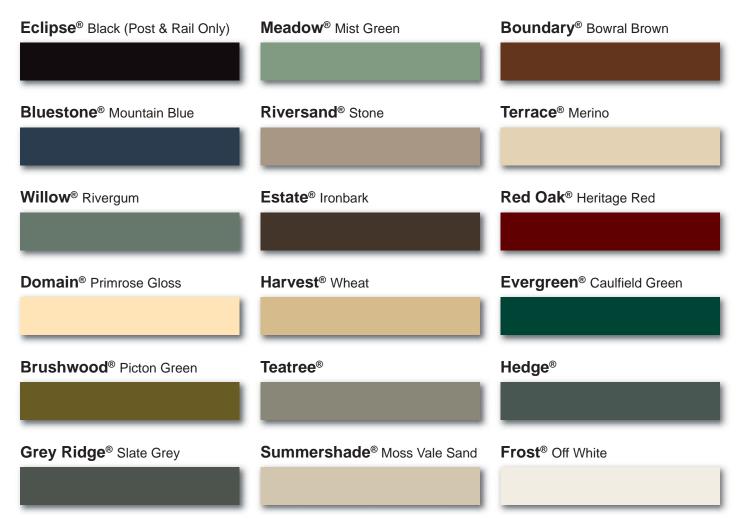

Please Note: Colours shown above are as accurate as printing allows. It is advisable to see your ColorMAX® distributor for actual colour swatches.



Maintenance Guide

- Avoid earth or soil coming in contact with the fence.
- Check drainage holes occasionally for any blockages.
 Fertilisers and garden chemicals should not be used in or around
- fences to limit contact. • Slope all concrete away from posts to limit any water build up
- around the base of posts.

• All fences should be washed down regularly to keep fences clean and looking their best.

• Metalling from self drilling screws, rivet shanks and other steel particles will cause rust staining. Remove from fencing immediately following installation.